
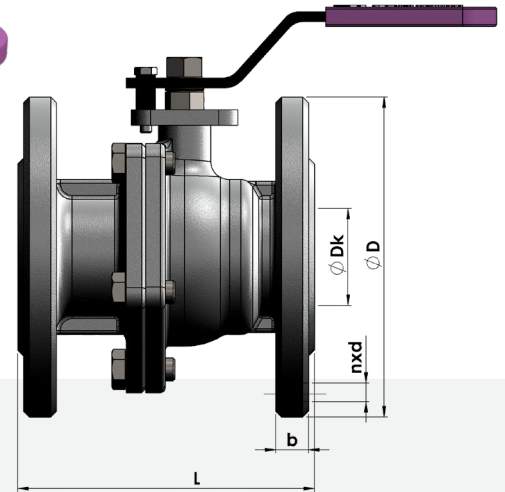


2 Pcs Ball Valves

D655-DN200
PN16-PN40

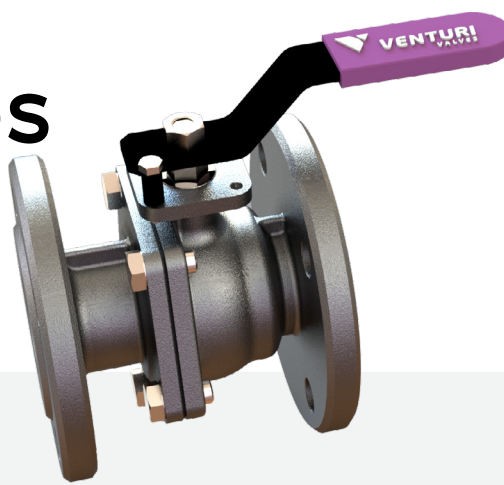

List of Materials

Item	Part	Material Group acc. to EN 12516-1	
		Application	
		up to 180 °C	up to 180 °C
		1.0619	1.4408
1	Body	1.0619	
2	Ball	A182 F316 or A351Gr. CF8M	
3	Seat	TFM1600 / PTFE / RTFE	
4	Stem	316SS	
5	Stem Nut	A194-8	
6	Stud Bolts	A193 B7/1.7225	
7	Nuts	A194 2H/1.1191	
8	O-Ring	NBR/VITON	
9	Handle	Carbon Steel	

Standarts

Ball Valves according to EN 1983	PN 16 / PN 40
Face-to-face dimensions	EN 1759-1
Flanged ends	EN 1759-1

Dimensions PN16

DN		65	80	100	125	150	200
[mm]	L	170	180	190	325	350	400
	D	145	160	180	210	240	295
	Dk	185	200	220	250	285	340
	nxd	4x18	8x18	8x18	8x18	8x22	12x22

Dimensions PN40

DN		15	20	25	32	40	50	65	80	100	125	150
[mm]	L	115	120	125	130	140	150	170	180	190	325	350
	D	65	75	80	100	110	125	145	160	190	220	250
	Dk	95	105	115	140	150	165	185	200	235	270	300
	nxd	4x14	4x14	4x14	4x18	4x18	4x18	8x18	8x18	8x22	8x26	8x26